

Installation Manual Double DIN Kit



Carefully unclip the original panel. We recommend using panel removal tools to avoid any damage.




Before fitting the unit, cut and remove the two pivots on either side, as shown in the picture.



Remove the OEM head unit by unscrewing the four screws circled.



Connect all cables, insert the unit into the housing and fix it with the screws; verify the proper functioning of the system, including the touch buttons on the fascia plate.

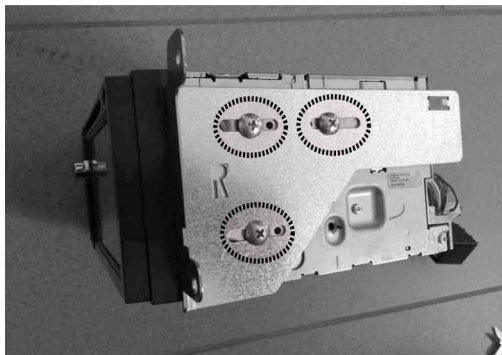

Take the left and right brackets and mount them on the unit using the screws supplied.



Mount the supplied fascia plate on the dashboard. The image shows the final result.

All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidental or indirect damages.

